FEATURES

- Double two-way rocker switch insert (reference 8300034).
- Available cover colours (sold separately, with reference 83000190X, where X = colour):
  - Anthracite RAL 9004 (X = 5)
  - Silver RAL 9006 (X = 6)
  - Matt white RAL 9016 (X = 9)
  - Champagne RAL 1035 (X = 4)
- Flush fitting with ZS55 series 1 to 4-gang frames (sold separately, with reference 980000Y0X, where Y = number of gangs, X = colour)
  - Anthracite RAL 9004 (X = 5)
  - Silver RAL 9006 (X = 6)
  - Matt white RAL 9016 (X = 9)
  - Champagne RAL 1035 (X = 4)
- The use of fixing clamps is optional. This reference is sold separately (reference ZACZSCLA2)
- Dimensions 55.0 x 55.0 x 34.8 mm
- Low profile: the decorative frame protrudes 9.5 mm from the wall
- Flush-mounted installation
- In compliance with the standard IEC 60669-1

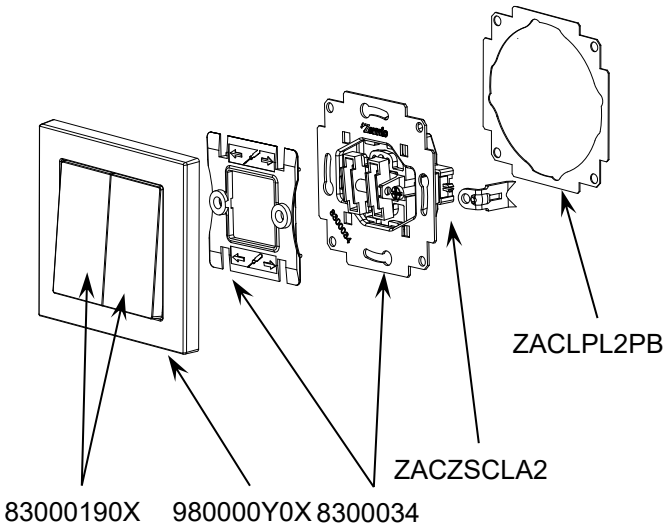



Figure 1. Double two-way rocker switch

GENERAL SPECIFICATIONS	
CONCEPT	**DESCRIPTION**
Rated voltage	250 VAC
Rated current	10 AX
Function type	6+6
Connection method	Four screwless terminals and two screw terminals (0.3 Nm max.)
Maximum cable cross-section	2.5 mm² (IEC) / 12 AWG (UL)
Operation temperature	0 .. +40 ºC
Storage temperature	-20 .. +55 ºC
Operation humidity	5 .. 95% RH
Storage humidity	5 .. 95% RH
Degree of protection	IP20, clean environment
Installation	Independent device to be installed in back boxes
Weight	75 g
Housing material	PC+ABS FR V0 halogen free


INSTALLATION INSTRUCTIONS

1. Connect the cables to the terminals and fix the metal plate into a square or round flush back box by using the screws from the back box (fixing clamps can optionally be used). Check that the plate is correctly leveled.
    a. If necessary, in order to improve the push feeling, stick the levelling piece from the inside through the incorporated adhesive, and it sits in between the back box and the insert as shown in the image.
2. Mount the frame on the insert by using the fixing plate.
3. Fix the covers into their final position checking that the device is duly fixed.


To remove it, proceed the reverse way considering that the fixing plate must be removed with the help of a screwdriver by levering the areas marked on the piece itself.

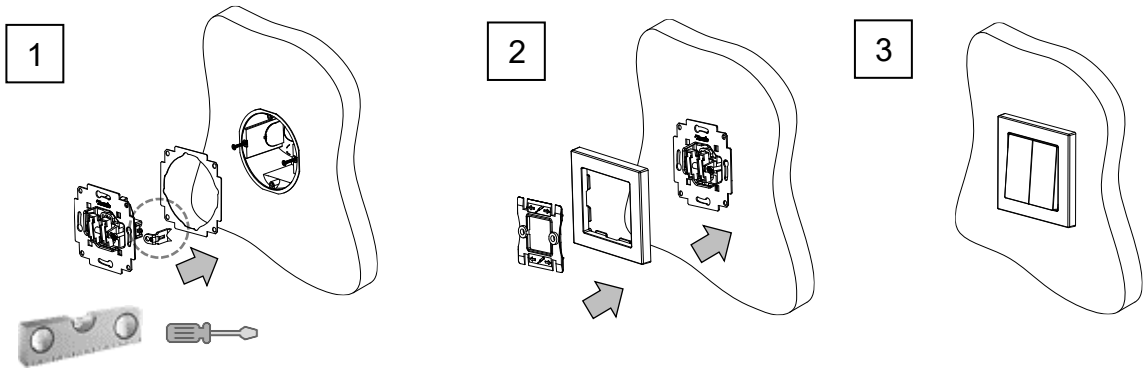

DIMENSIONS (mm)

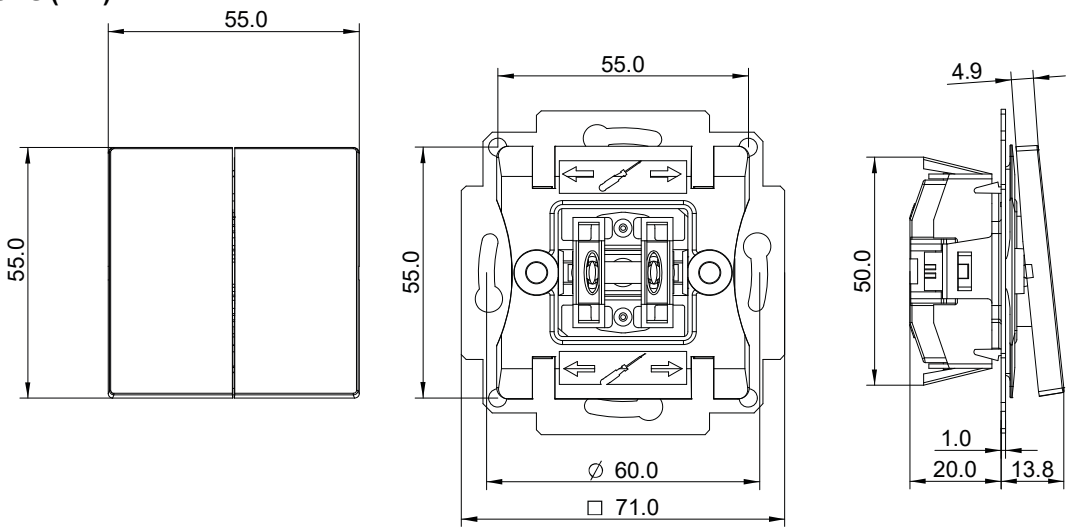

WIRING DIAGRAMS

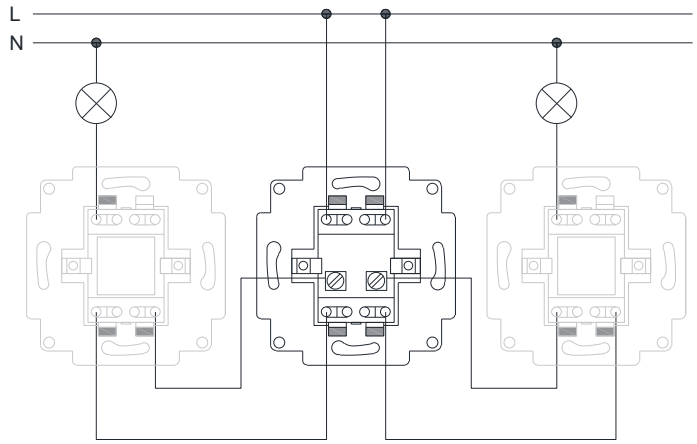

SAFETY INSTRUCTIONS AND ADDITIONAL NOTES

- Installation should only be performed by qualified professionals according to the laws and regulations applicable in each country.
- The facility must be equipped with a device that ensures the omnipolar sectioning. Installation of a 10 A mini-circuit-breaker is recommended. To prevent accidents, it must remain open in case of manipulation of the device.
- Keep the device away from water (condensation over the device included) and do not cover it with clothes, paper or any other material while in use.
- The WEEE logo means that this device contains electronic parts and it must be properly disposed of by following the instructions at https://www.zennio.com/en/legal/weee-regulation.